

# SPECIFICATION SHEET


## Bholanath

### Integrated Captive Linear Actuator stepper motor


**BH 42 SH 47 - 1704 ICLA (25/50)**  
**(T6 X 2)**  
**HIGH TORQUE HYBRID**



COMMITTED TO PRECISION  
[www.bholanath.in](http://www.bholanath.in)

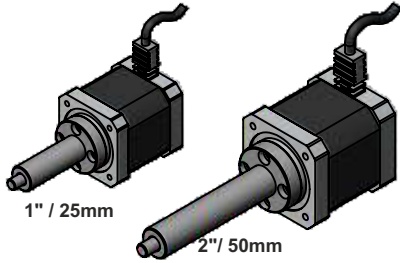

Travel Length (Inch/mm)	L1 (mm)	L2 (mm)
1" / 25mm	49	32.50
2" / 50mm	74	57.5

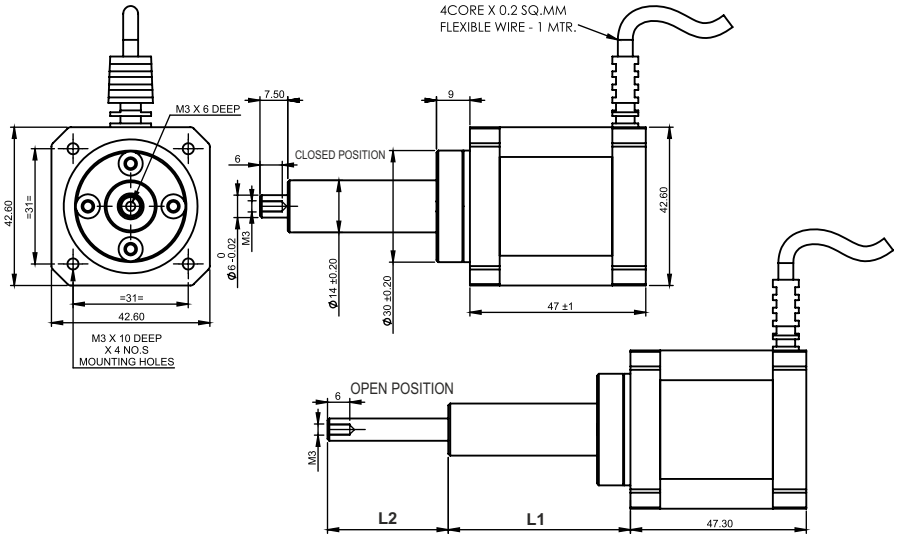

## TECHNICAL DATA

### CHARACTERISTICS

- Step Angle - 1.8°
- Step Angle Accuracy - ± 5%
- Insulation Class - H
- Ambient Temperature - (- 20°C to + 50°C)
- Temperature Rise - 80°C Max. ( Rated Current Phase 2 ON )
- Insulation Resistance 100 M Ohms Min. 500 VDC
- Dielectric Strength 500 VAC For One Minute



### SPECIFICATION

**BH 42 SH 47 - 1704 ICLA (25/50)**  
**(T6 X 2)**

	MODEL	Bipolar
1	Current / phase	A
2	Max Horizontal Load Carrying Capacity (Kg)	30
3	Permissible Feed Speed (mm/sec)	30
4	Position Accuracy (mm)	0.05
5	Degree of protection (IP rating)	30
6	Linear Step Size at full step (Micron)	10
7	Operating voltage (VDC)	12 to 24
8	Max Axial play (mm)	± 0.05
9	Total Weight of ICLA (Gm)	500

**Note:-** The Load Calculation is Based On Horizontal Movement. For Vertical Movement Kindly Consider Safety Factor Of 0.6 And Motor With Brake.

### Wiring Diagram

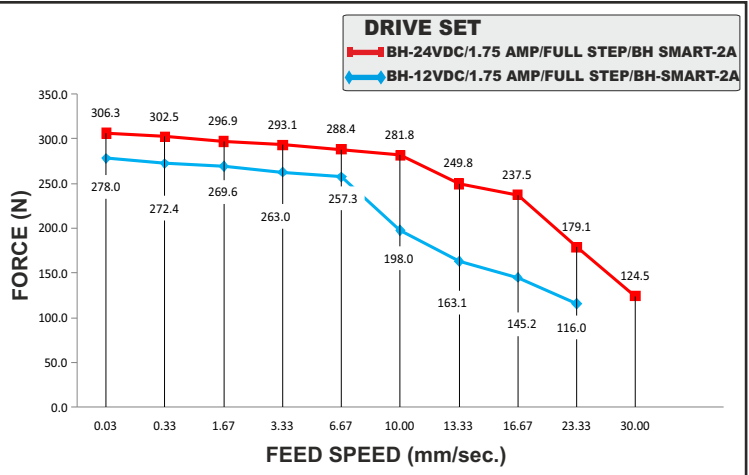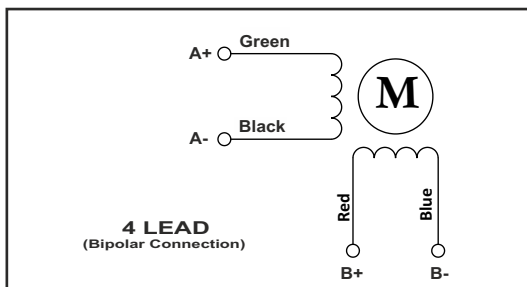

# Bholanath Precision Engineering Pvt.Ltd.

11,Kembros Ind.Estate , Sonapur Lane , Bhandup (W),Mumbai - 400078.

Telefax/Phone : 25662856/25664338/67993260 Email : support@bholanath.in

Mobile No : 9920903825/9821671733/9930514603/9819515543/9323166582.

BHOLANATH COOL STEPPERS™