


SPECIFICATION SHEET
Bholanath


Integrated Captive Linear Actuator stepper motor
BH 42 SH 60 - 0854 ICLA (25/50)
(M6 X 1)
HIGH TORQUE HYBRID



COMMITTED TO PRECISION
www.bholanath.in

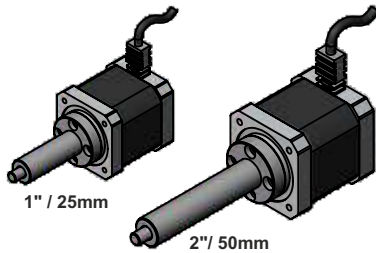

Travel Length (Inch/mm)	L1 (mm)	L2 (mm)
1" / 25mm	49	32.50
2" / 50mm	74	57.5

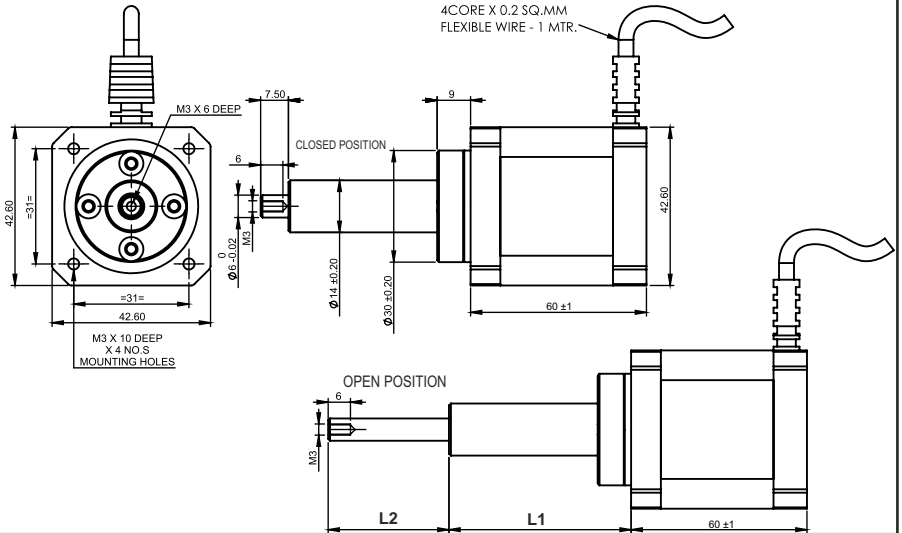

TECHNICAL DATA

CHARACTERISTICS

- Step Angle - 1.8°
- Step Angle Accuracy - $\pm 5\%$
- Insulation Class - H
- Ambient Temperature - (-20°C to +50°C)
- Temperature Rise - 80°C Max. (Rated Current Phase 2 ON)
- Insulation Resistance - 100 M Ohms Min. 500 VDC
- Dielectric Strength - 500 VAC For One Minute



SPECIFICATION

BH 42 SH 60 - 0854 ICLA (25/50)
(M6 X 1)

	MODEL	Bipolar
1	Current / phase	A
2	Max Horizontal Load Carrying Capacity (Kg)	37
3	Permissible Feed Speed (mm/sec)	15
4	Position Accuracy (mm)	0.05
5	Degree of protection (IP rating)	30
6	Linear Step Size at full step (Micron)	5
7	Operating voltage (VDC)	24 to 36
8	Max Axial play (mm)	± 0.05
9	Total Weight of ICLA (Gm)	600

Note:- The Load Calculation is Based On Horizontal Movement. For Vertical Movement Kindly Consider Safety Factor Of 0.6 And Motor With Brake.

Wiring Diagram

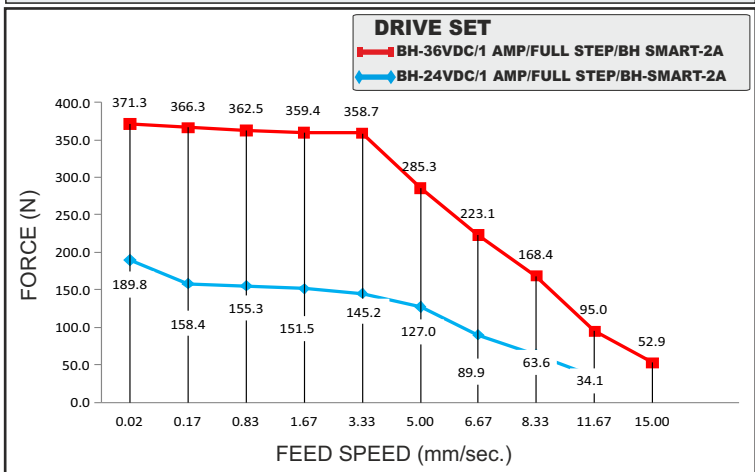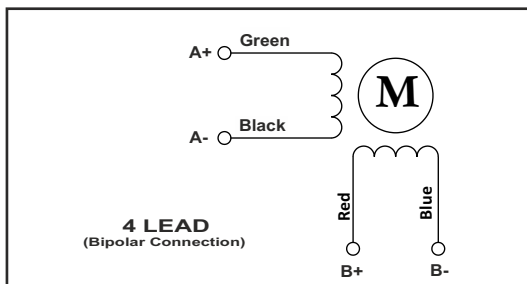

Bholanath Precision Engineering Pvt.Ltd.

11, Kembros Ind. Estate, Sonapur Lane, Bhandup (W), Mumbai - 400078.
Telefax/Phone : 25662856/25664338/67993260 Email : support@bholanath.in
Mobile No : 9920903825/9821671733/9930514603/9819515543/9323166582.