

BHOLANATH ROD STYLE LINEAR ACTUATORS(RSLA)

ERSLA- IP - Electric Rod Style Linear Actuator- High Speed Pneumatic Replacement (Inline)

Patented technology, Stepper motor based, Programmable

Model no - BH-RSLA-IP- 960N -65

Efficient and economical rod style motorized linear actuators for wide variety of applications - Door and Window opening /closing, gate applications, Hospital beds, Dental chairs, home and kitchen automation, office automation, warehouse automation, assembly line plant and machinery automation packaging line automation etc.

Bholanath electric actuators are available in ready to use with inbuilt stepper driver & controller. The controller is an patented advance technology which includes stepper motor driver and programming logic control and is inbuilt in the **ERSLA -I**. There is no need of limit switches for end limits.

To watch videos kindly click on below youtube links or scan the QR codes

Youtubelink

https://www.youtube.com/watch?v=_KecxMdMI3g



Standard Features -

Motor - **Stepper Motor**

Nema size - **17**

Control Signal- **Digital Pulse & direction (5Vdc)**

Positional accuracy- **0.05mm**

Operating Voltage - **24VDC**

Wattage - **40W**

Force - **960N**

Vertical load lift capacity -**3 Kg**

Horizontal load push - pull capacity - **6 Kg**

Feed speed - **65 mm/sec (Different feed speed available on request)**

Stroke Length - **2 inch, 4 inch, 6 inch, 8 inch, 10 inch, 12 inch.**

Piston rod diameter -**16mm**

Protection class - **IP 30**

Duty Cycle - **25%**

Ambient operating temperature - **-10 deg celcius to +45 deg celcius**

Ball screw/Lead screw - **Lead Screw**

Life -**1250 Hours.**

Standard cable wire - 1mtr

Total weight Of RSLA- **2.3 Kg**

Optional Features

1) Inbuilt Controller programing option

This is a programmed fixed feed speed, ready to use, with single phase supply (230VAC/110VAC).

Single switch or double switch with power supply, 1 mtr cable and single phase 230VAC/110VAC input.

i) Single switch mode (BH-S1-FL) (S1) finite length movement :- Pressing the switch S1 the ERsla will move outword to the full travel length, 2nd pressing (S1) the ERSLA will move back to home position

ii) Double switch mode(BH-S1,S2-FL) :- (S1,S2) finite length movement :- Pressing the switch S1 the ERsla will move outword to the full travel length, 2nd pressing (S2) the ERSLA will will move back to home position


iii) Double switch mode(BH-S1,S2-UL) (S1,S2) :- Adjustable movement :- Pressing switch (S1), ERSLA will move in outword direction. Pressing switch S2 the ERSLA will move to word home position . Releasing switch S1 or S2 will stop the ERSLA movement.



2. Modbus Control (MBUS)
3. Analog Input - 4 -20 mA
4. Analog Input - 2- 10 volt
5. Factory set feed speed other than standard
6. Guide bar
7. Additional fitments as per page no 4
8. The following options are available without inbuilt controller. .
 - i) IP rating RSLA - IP 60, IP 65
 - ii) Flame proof (FLP) RSLA- IEC/NEC/ATEX
 - iii) High Ambient Temperature RSLA- 80 deg celsius, 100 deg Celsius, 120 deg Celsius
 - iv) Sub Zero ambient temperature RSLA (- 20°C),(- 40°C)
 - v) 24VDC Failsafe Brake (BRK) ERSLA
 - vi) Incremental and absolute encoder Feedback ERSLA
 - vii) Step servo motor RSLA with step servo drive
 - viii) CE Marked ERSLA

Ordering Code:-
BH-ERSLA-IP-960N-65mm/sec (Mention travel length)
Please mention additional options required from page 2 & 3 Optional Features

Schematic diagram

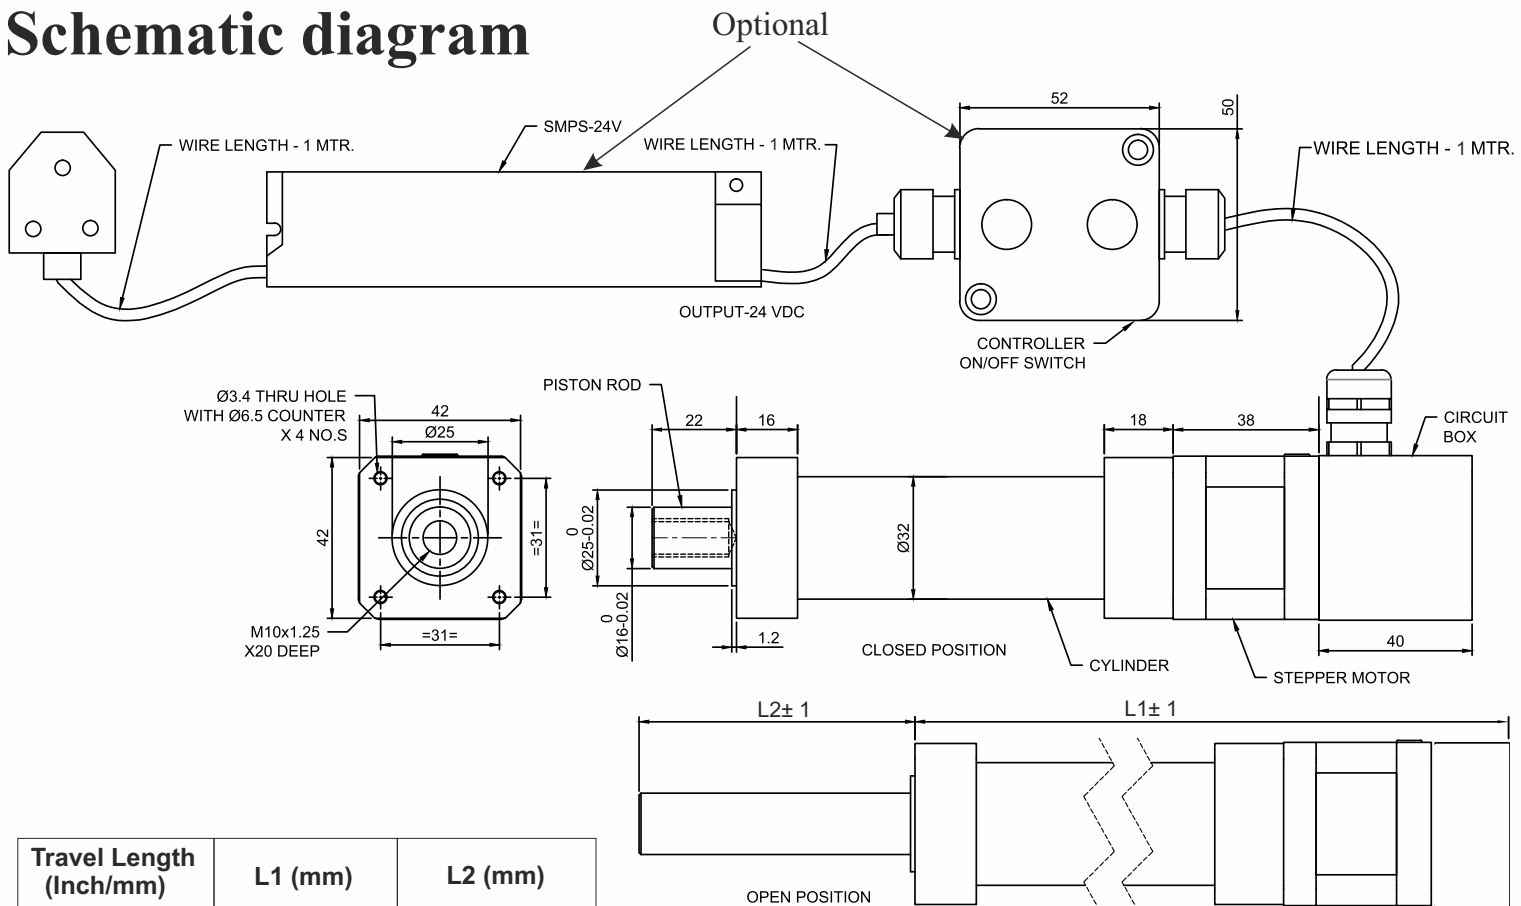

Travel Length (Inch/mm)	L1 (mm)	L2 (mm)
2" / 50mm	192	72
4" / 100mm	242	122
6" / 150mm	292	172
8" / 200mm	344	222
10" / 250mm	392	272
12" / 300mm	442	322



Signal Wiring Details:-

- Yellow → Pulse -
- Green → Dir -
- Blue → ENA-
- White → Com.
- Red → + VDC
- Black → - VDC


Inline Rod Style Linear Actuator

Accessories


ISOMETRIC VIEW RSLA with matching Accessories

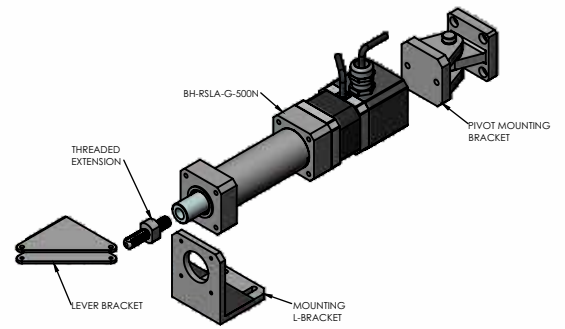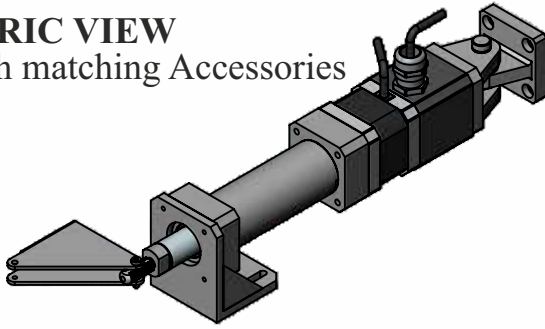

Nema 17 Lever Bracket (BH42-LB)

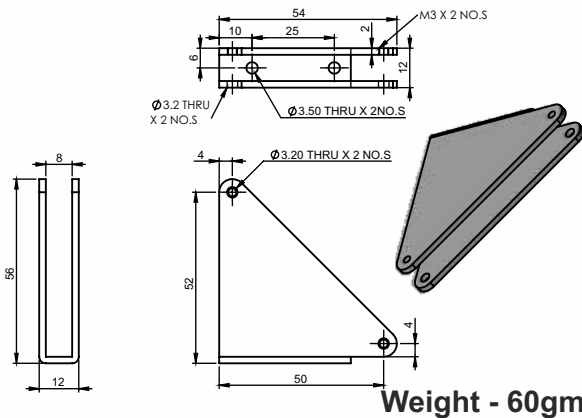


Nema 17 Thread Extension (BH42-TE)

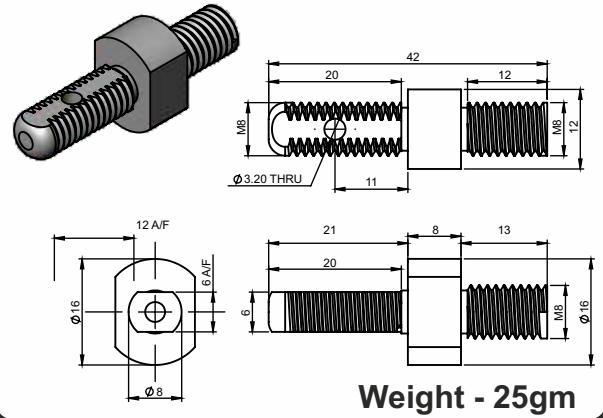


Nema 17 Pivot Joint Bracket (BH42-PJB)

Weight - 350 gm

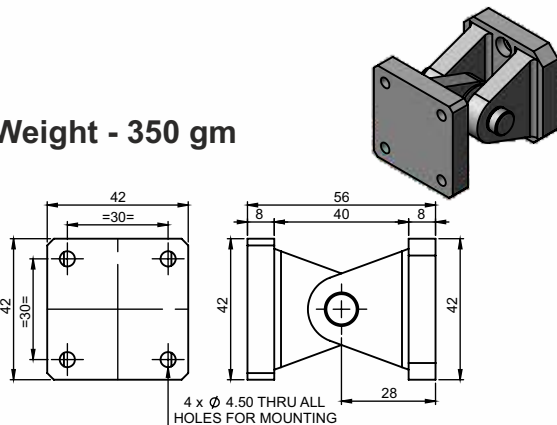

Nema 17 Mounting L - Bracket (BH42-MB)

Weight - 200gm

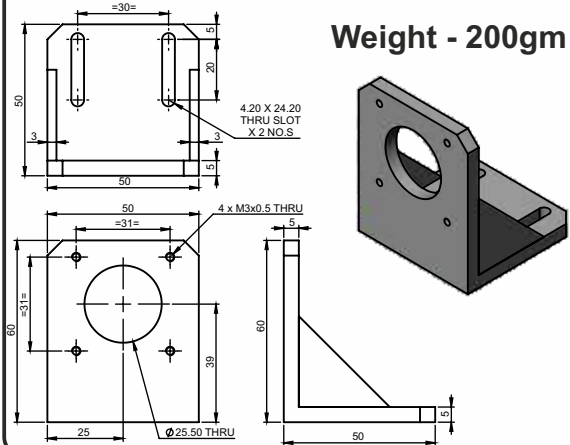

Guide Rod (BH42-GR)

