


SPECIFICATION SHEET
Bholanath



Rotary Indexing System
BH-RIS-01-C(M+E+P)



Stepper Motor Based Highly Accurate Rotary Indexing System Models- BH-RIS-01 -A Bholanath Rotary Indexing Systems are Used in all Automation Applications, Machine Tools and General Industry Applications Bholanath Manufacture Stepper Motor , Stepper Drives ,Power Supplies & Stepper Drive Controllers That Perfectly Compliment Rotary Indexing Systems.

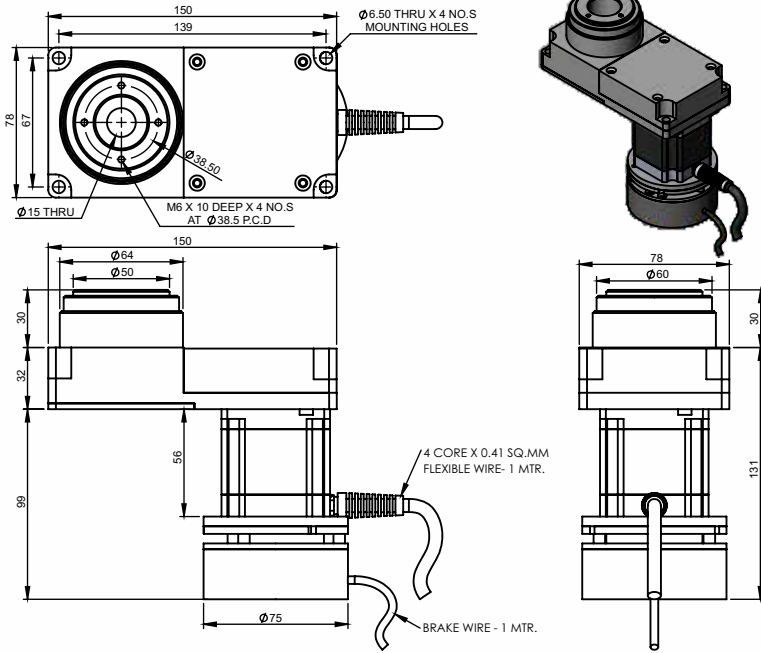

BRAKE DETAILS :
 Torque : 3 Nm
 Voltage : 24 V
 Current at 20°C - 0.4 Amps
 Power Consumption at 20°C : 9.34 Watts



Indexing Degree :- 0.6°..3°..30°,45°,60°, 90°...180°...360°...
 {n(3)/1.8} where n is Indexing degree.

Example:- n=270°
 =(270X3)/1.8
 =450(Hence 270° indexing is possible)

Note:- Continuous Movement up to 100RPM .

Stepper Drive
BH-SMART-4.5A
 Weight :- 350 gm
 Qty 01 Nos



Stepper Drive Controller
BH-SDC-01-N
 Weight :- 0.3 KG
 Qty 01 Nos



Power Supply
BH-48VDC
 Weight :- 3 KG
 Qty 01 Nos




Two Drive Control Panel
 Weight :- 10 KG
 Qty 01 Nos



TECHNICAL DATA

SPECIFICATION	Model No	BH-RIS-01-C (M+E+P)
1	Maximum load carrying capacity(kg)	3.0
2	Permissible Feed Speed (RPM)	0 to 100
2	Gear Ratio of Indexing Table	3:1
3	Positioning Accuracy	± 1 Degree
4	Degree Of protection	IP 40
5	Total Weight Of Rotary Indexing (KG)	5.2
6	Total Weight Of Systems (KG)	17

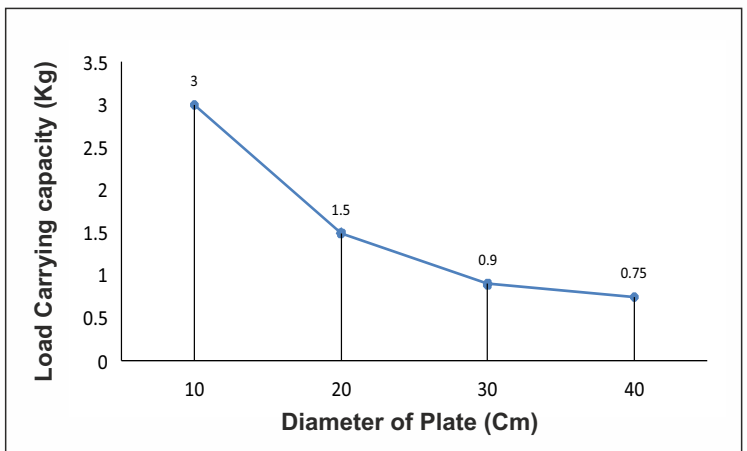

Model No:- BH-RIS-01-C (M+E+P)



Bholanath Precision Engineering Pvt.Ltd.

11,Kembros Ind.Estate , Sonapur Lane , Bhandup (W),Mumbai - 400078.
 Telefax/Phone : 25662856/25664338/67993260 Email : support@bholanath.in
 Mobile No : 9920903825/9821671733/9930514603/9819515543/9323166582.